

Brazed Heat Exchanger SFB20 Series

SFB21



ZILONIS Energy Solutions Brazed Plate Heat Exchangers is the ideal choice suitable for a wide variety of applications across numerous markets segments.

Typical applications:

- General cooling/heating
- HVAC
- Refrigeration
- Industrial
- Marine
- Data centres
- Heat pump
- Solar heating

Features:


Every detail is carefully designed to ensure optimal performance:


- Compact design
- High flexibility
- Design pressure up to 40 bar
- Operating temperature: up to 185° C

Benefits:

- Lower operating costs
- Reduce life cycle cost
- Easy installation
- High thermal transfer efficiency
- Increased energy efficiency
- Low weight



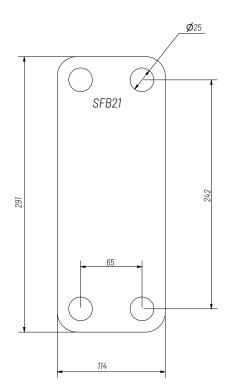

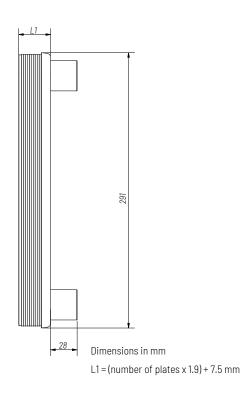

Design pressure:

• Copper brazed: 25 and 40 bar (362 and 435 PSI)

Temperature:

-100 to 185°C (-148 til 365°F)

Construction standards:

• EN13445

Connections:

- 3/4"inside pipe thread IS07-R
- 1" pipe thread ISO7-R

Number of plates (options):

• SFB21: 11, 15, 21, 31, 41, 51, 61, 71, 81, 91, 101

Plate material:

• AISI 316


Brazing material:

• Copper

Accessories:

- Insulation jackets
- Foundation feet

PED Pressure/Temperature

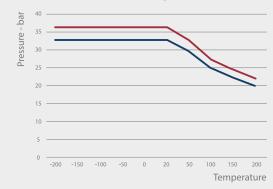

ZILONIS Energy Solutions GmbH reserves the rights to change the specifications without prior notification.